


Crafted for ~60' - 69' boats, up to ~50 tons, the Seakeeper 16 is designed to eliminate up to 95% of boat roll. The Seakeeper 16 is completely internal, requires only modest electrical power, and can be installed virtually anywhere on board.




## TECH SPECS

<b>Rated Speed</b>	6,130 RPM
<b>Angular Momentum at Rated RPM</b>	16,000 N-M-S
<b>Max Anti-Rolling Torque at Rated RPM</b>	30,720 N-M
<b>Spool-up Time to Rated RPM</b>	57 minutes (6,130 RPM)
<b>Spool-up Time to Stabilization</b>	45 minutes (5,210 RPM)
<b>Spool-up Power</b>	
AC Motor	3000 Watts Max
DC Control	240 Watts
<b>Operating Power</b>	
AC Motor (sea state dependent)	2300 - 3000 Watts
DC Control	240 Watts
AC Input Voltage	208 - 230 VAC (+/-10%), 50/60 Hz, Single Phase
DC Input Voltage	24 VDC @ 10 Amps
<b>Sea Water Supply to Heat Exchanger</b>	30 LPM (8 GPM) Maximum 15 LPM (4 GPM) Minimum
<b>Ambient Air Temperature</b>	0° - 60° C (32° - 140° F)
<b>Weight</b>	2,195 lbs (996 kg) Bolt-in Installation
<b>Envelope Dimensions</b>	Length x Width x Height 42.6 L x 43.2 W x 32.8 H (Inches) 1.08 L x 1.10 W x 0.83 H (Meters)
<b>Noise Output</b>	At full operating RPM, steady state noise measured in the factory at a 1 meter distance measures 68 - 73 dBC. (Sound levels may be higher during spool-up)

## PORT VIEW

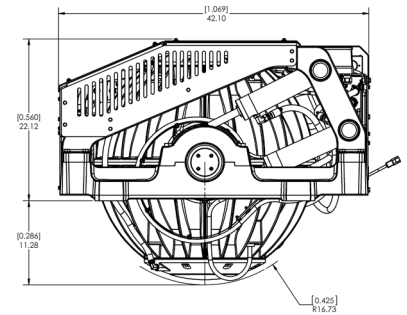

## FRONT VIEW

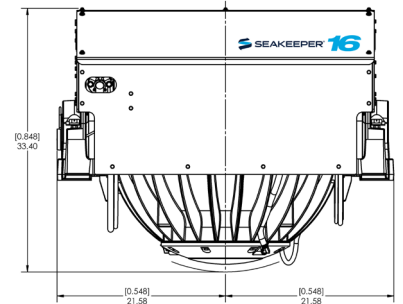

## TOP VIEW

